


# Public Escalator Specification

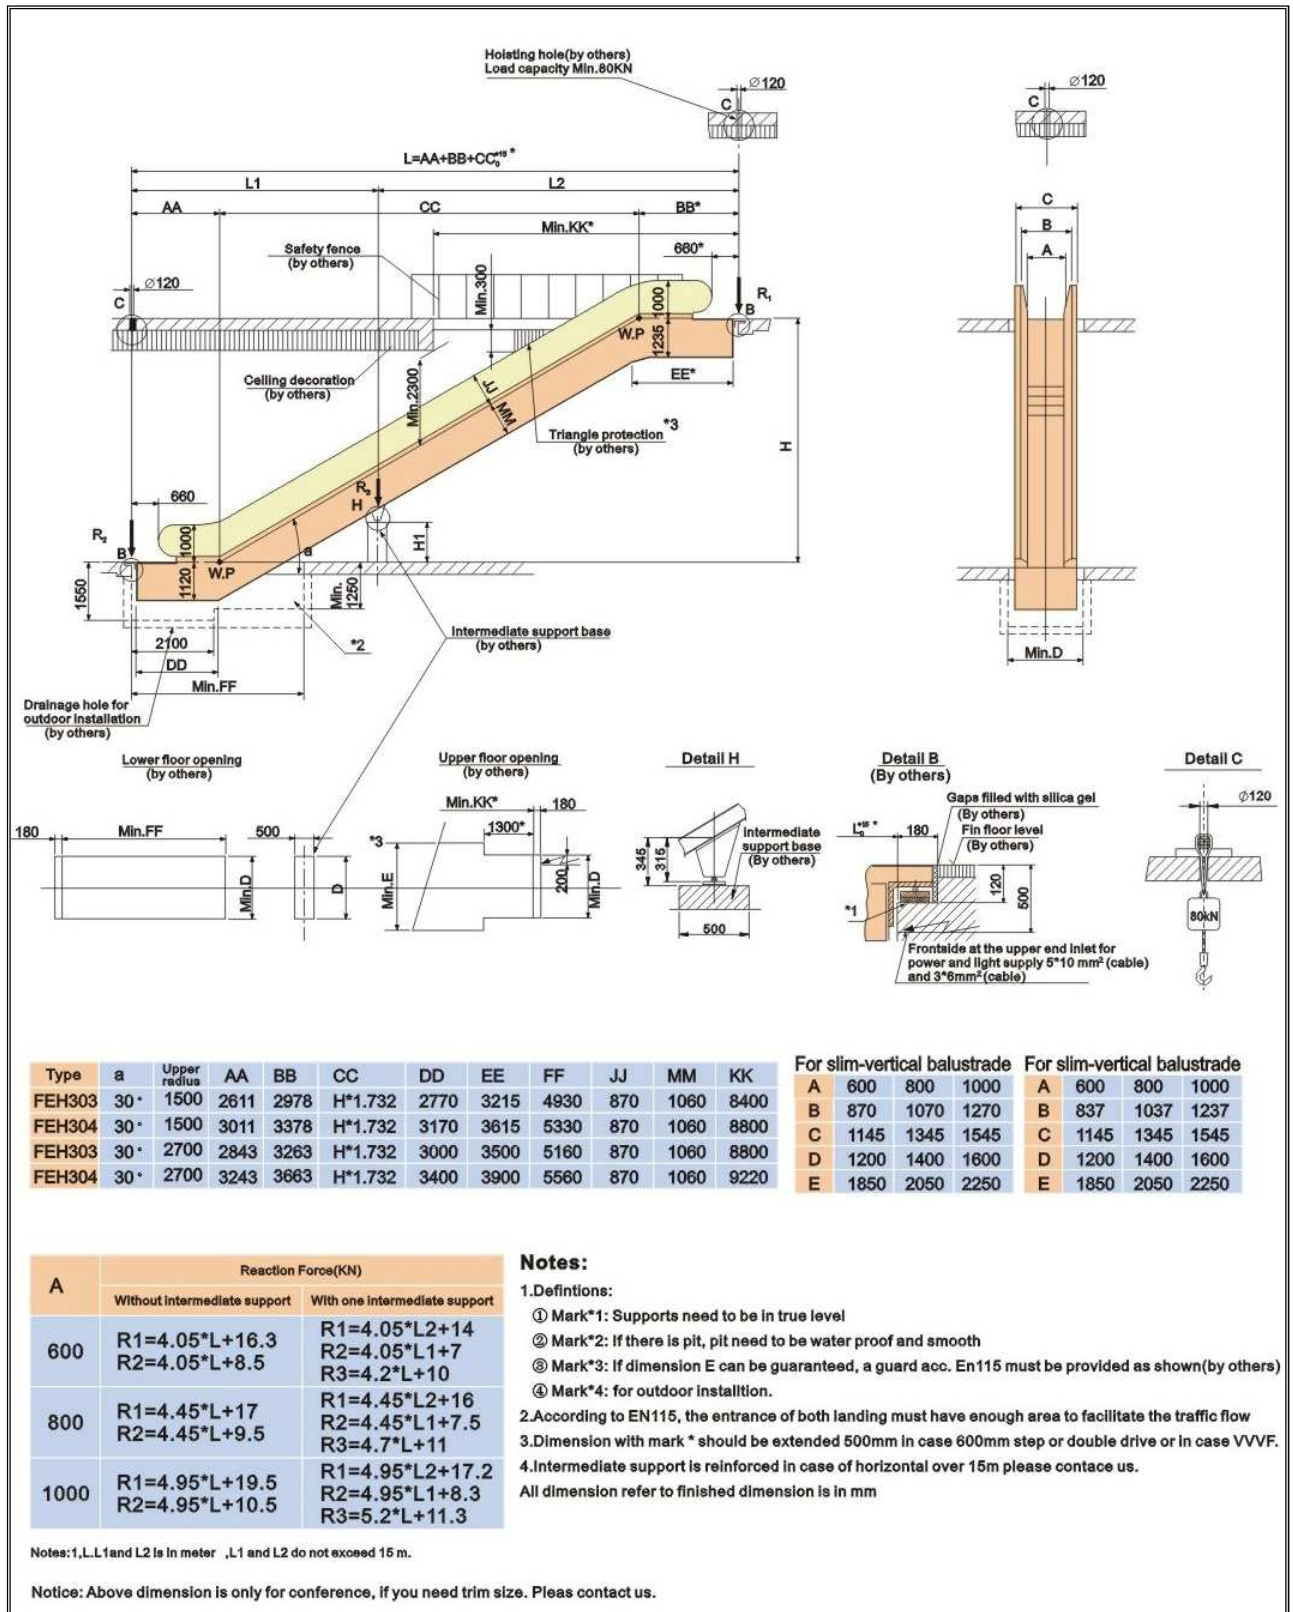

Type	a	Upper radius	AA	BB	CC	DD	EE	FF	JJ	MM	KK	For slim-vertical balustrade			
												A	B	C	
FEH303	30°	1500	2611	2978	H*1.732	2770	3215	4930	870	1060	8400	A	600	800	1000
FEH304	30°	1500	3011	3378	H*1.732	3170	3615	5330	870	1060	8800	B	870	1070	1270
FEH303	30°	2700	2843	3263	H*1.732	3000	3500	5160	870	1060	8800	C	1145	1345	1545
FEH304	30°	2700	3243	3663	H*1.732	3400	3900	5560	870	1060	9220	D	1200	1400	1600
												E	1850	2050	2250

A	Reaction Force(KN)	
	Without intermediate support	With one intermediate support
600	R1=4.05*L+16.3 R2=4.05*L+8.5	R1=4.05*L2+14 R2=4.05*L1+7 R3=4.2*L+10
800	R1=4.45*L+17 R2=4.45*L+9.5	R1=4.45*L2+16 R2=4.45*L1+7.5 R3=4.7*L+11
1000	R1=4.95*L+19.5 R2=4.95*L+10.5	R1=4.95*L2+17.2 R2=4.95*L1+8.3 R3=5.2*L+11.3